


28





Infra red bulb for direct heat on PVC foil.

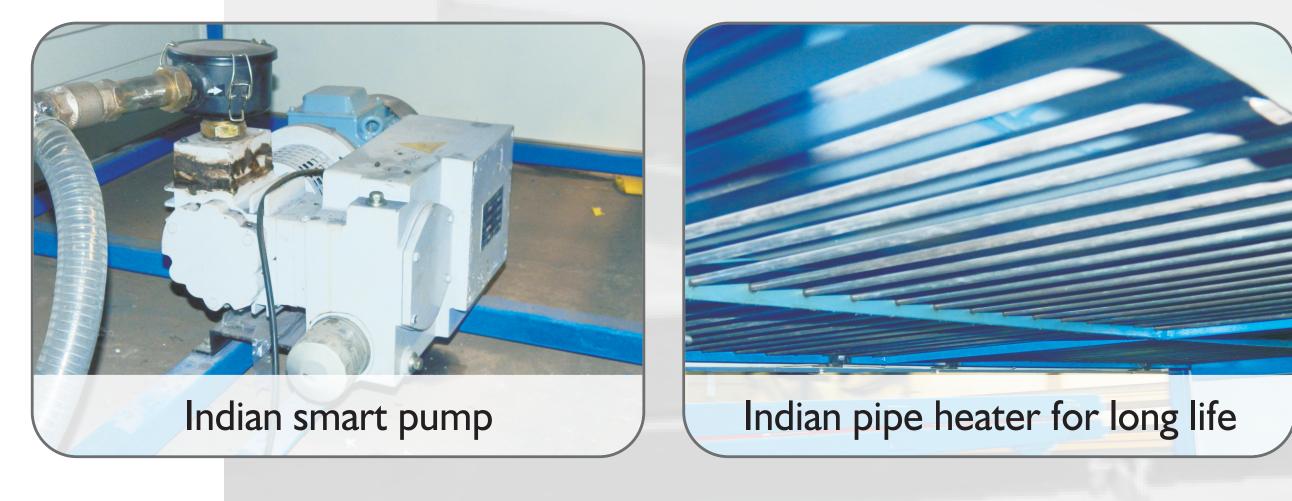

FOUR SIDE MOULDER UFM4/4 + 1/5/5 + 1/6/6 + 1

High productivity and high product quality quick and accurate setup Minimum trouble; maximum dependability comprehensive technical service


SALIENT FEATURES

- Inverter feeds speed of 6-30 m/min.
- Individual motor to each spindle to save maximum power transmission.
- Hard chromed bed blates to minimise bed wear.
- Bottom driven plate rollers for increased feeding performance.
- Manual bed lubrication to reduce friction and improve feeding difficult timbers.
- Sealed safety enclose to reduce noise levels, improve extraction & operator safety

APPLICATIONS

* WidelxeusedrferierRakinsengeppfreutier&orwooden flooring.



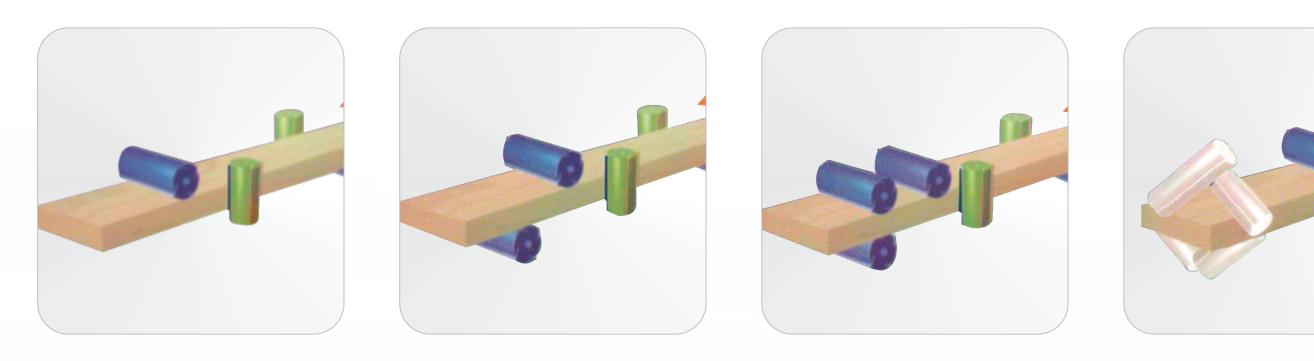

TECHNICAL SPECIFICATIONS

MODEL	UFM 4	UFM 4+1	UFM 5	UFM 5+1	UFM 6	UFM 6+I
Working width Min. & Max.	20mm & 230mm					
Working thickness Min. & Max.	8mm & 120mm	8mm & 120mm	8mm & 160mm	8mm & 160mm	8mm & 160mm	8mm & 160mm
Number of spindles	4	4 + 1	5	5 + I	6	6
Spindle speed	6000r/min	6000r/min	6000r/min	6000r/min	6000r/min	6000r/min
Spindle diameter	Ø40mm	Ø40mm	Ø40mm	Ø40mm	Ø40mm	Ø40mm
Max length cutter block	240mm	240mm	240mm	240mm	240mm	240mm
Total motor power	21.5kw/29hp	25.57kw/32.7hp	35.6kw/48hp	44.28kw/59.75hp	42.1kw/57hp	51.28kw/69.25hp
Overall dimensions	3300x1100x1710mm	3800x1100x1710mm	3760x1730x1750mm	4730x1890x1750mm	4730x1890x1750mm	5670x1890x1750mm

Umaboy

The Umaboy 4-side moulder provides you significant and measurable productivity gains-no matter how complex your cut. The UFM series 4-side moulder offer you faster, more profitable production on complicated profile. The series of moulder features high feed speed of up to 30 m/min. Each spindle is driven individually by a powerful motor, making the machine ideal for heavy cutting. The entire machine is ruggedly constructed throughout to exhibit the highest stability in high speed machining. The machine is equipped with a high performance plc controller for user – friendly operation.

